

# SV-RTK


Volumetric dry water meter  
for cold water DN15÷40



SV-RTK is a volumetric dry water meter which fulfils the strictest requirements for indication accuracy set out in the standard EN 14154+A1:2007 and is designed for precise measuring of supplied water use. Due to advanced structural solutions, the water meter is fully compatible to be integrated with a remote reading system. Moreover, it is very well protected against strong magnetic field impact. The water meter complies with the MID Directive for the measurement range corresponding to the value of R=200.

## APPLICATION

Water supply systems for cold water up to 30°C or water up to 50°C for single or multifamily houses, public buildings and metering points. The water meter design allows it to be installed in any position without the loss of metrological parameters. Thanks to a rotary counter enabling easy read-out of indications, the water meter works unfailingly in different installation positions. Constituting a part of a metering unit, it enables to determine the water consumption profile in buildings.

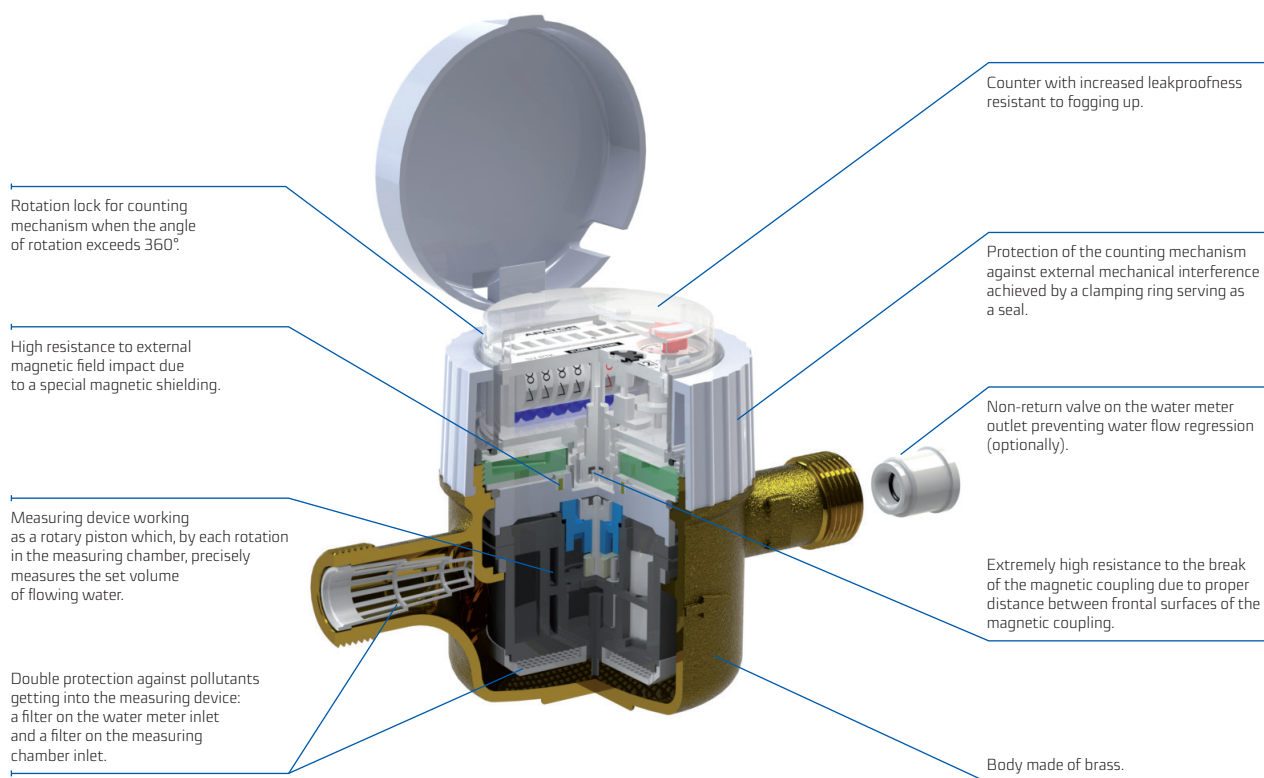

## Advantages

### COST SAVING:

- Accurate measurement even of the smallest volume of flowing water determined by the R200.
- Preserving invariable metrological parameters regardless of the water meter position.
- Starting value for the water meter: DN15 = 1,5 l/h, DN20 = 2 l/h, DN25 = 3 l/h, DN32 < 10 l/h, DN40 < 20 l/h.
- Protection against:
  - strong magnetic field interference (magnetic shielding),
  - mechanical interference (a clamping ring serving as a seal),
  - multiple counter rotation by an angle exceeding 360°.

### CONVENIENCE OF USE:

- Possibility of remote readings.
- Ease of reading due to:
  - eight-roller counter,
  - placing the counter in any position within 360°,
  - hermetic counter resistant to fogging up.
- Design enabling remote reading.

### RELIABILITY:

- Proven and solid construction composed of materials of highest quality, resistant to wear and tear.
- Double protection against pollutants getting into measuring device.

## Characteristic features

- Low starting value allowing to detect even the smallest flows (from 1,5 l/h for DN15).
- Measuring device working as a rotary piston.
- Quiet water meter mechanism.



SV-RTK  
brass body

## Compliance with standards and regulations


- Directive 2004/22/EC of the European Parliament and the Council of Europe of 31 March 2004 on measuring instruments.
- PN-EN-14154:2011 –Water meters. Part 1 3.
- OIML R49:2004 and 2006 –Water meters designed for the measurement of cold drinking water.
- EC-type examination certificate – cold water no. TCM 142/11-4803.
- Classification of environmental, climatic and mechanical conditions - class B - under PN-EN-14154-3:2005:A1.
- Classification of environmental, climatic and mechanical conditions - class M1 - under RMG of 18 December 2006.
- Classification of environmental and electromagnetic conditions - class E1 - under RMG as of 18 December 2006.

All materials used to manufacture the SV-RTK water meter have appropriate Hygienic Certificates allowing the product to come into contact with drinking water.

## Sample order

Indication

SV-RTK - Q3 - DN - L - R - W

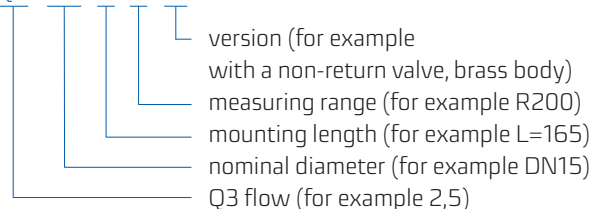

Additional information:

- brass body (in a standard version, all sizes).
- protection degree - IP65 in a standard version.


The following elements are supplied on additional request:

- Connectors to water meters without a non-return valve.
- Disposable clamps with snap-in seals made of plastic with individual, unique numbering (preventing mechanical manipulation of water meter connectors).


Table 1. TECHNICAL DATA

Parameter			SV-RTK					
			SV-RTK-2,5	SV-RTK-4,0	SV-RTK-6,3	SV-RTK-10	SV-RTK-16	
Nominal diameter		DN	mm	15 or 20*	20	25	32	40
Continuous flow rate		Q <sub>3</sub>	m³/h	2,5	4,0	6,3	10,0	16,0
Overload flow rate		Q <sub>4</sub>	m³/h	3,125	5,0	7,875	12,5	20,0
Transitional flow rate	R200	Q <sub>2</sub>	dm³/h	20	32	50,4	80	128
Minimum flow rate	R200	Q <sub>1</sub>	dm³/h	12,5	20	31,5	50	80
Starting flow rate		–	dm³/h	<1,5	<2	<3	<10	<20
Q <sub>3</sub> /Q <sub>1</sub> ratio - standard version		–	R	200 in all installation positions				
Q <sub>2</sub> /Q <sub>1</sub> ratio		–	–	1,6				
Temperature class (nominal temperature class)		–	–	T30 / T50				
Flow profile sensitivity classes		–	–	U0, D0				
Indications range		–	m³	99 999,999				999 999,99
Resolution of reading		–	m³	0,00002				0,0002
Maximum pressure		P <sub>max</sub>	MPa	1,6				
Maximum pressure loss		Δp	kPa	63				
Admissible limiting error within: Q <sub>2</sub> < Q < Q <sub>4</sub>		ε	%	± 2 for cold water (T ≤ 30°C), ± 3 for water (T > 30°C)				
Admissible limiting error within: Q <sub>1</sub> < Q < Q <sub>2</sub>		ε	%	± 5				
Protection degree of the water meter counter		–	–	IP65				
Thread of connection pipe, input and output		G	cal	G¾	G1	G1¼	G1½	G2
Height	h	mm	40	55	60	75	85	
	H	mm	110	130	150	160	175	
Length		L	mm	110 or 165	190	260	260	300
Diameter		D	mm	80	90	120	150	175
Weight (without connection elements)		–	kg	1,0 / 1,4	1,3	3,2	4,6	6,9

\* SV-RTK-2,5 DN20 for lenght 165 mm only

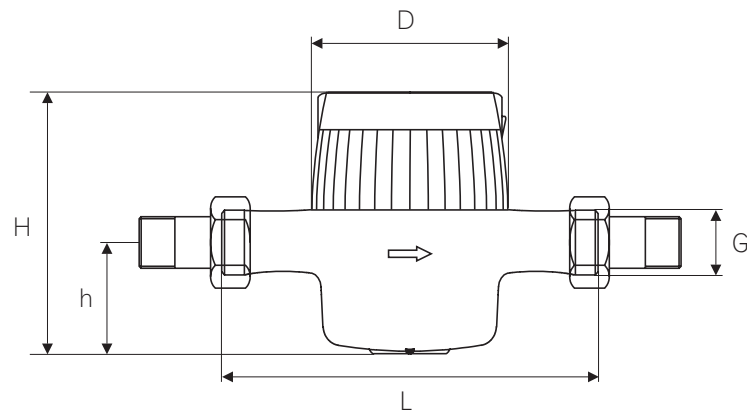


## CONNECTING ELEMENTS

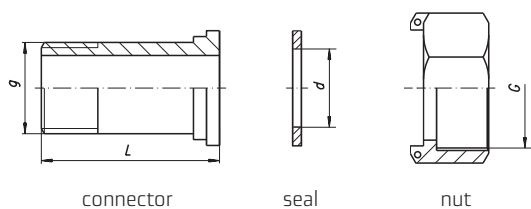


DN	G	g	d	L
15	3/4"	1/2"	17	37,5
20	1"	3/4"	23	45,6
25	1 1/4"	1"	29	46,5
32	1 1/2"	1 1/4"	36	56,0
40	2"	1 1/2"	43	66,0


## PRESSURE LOSS CHART

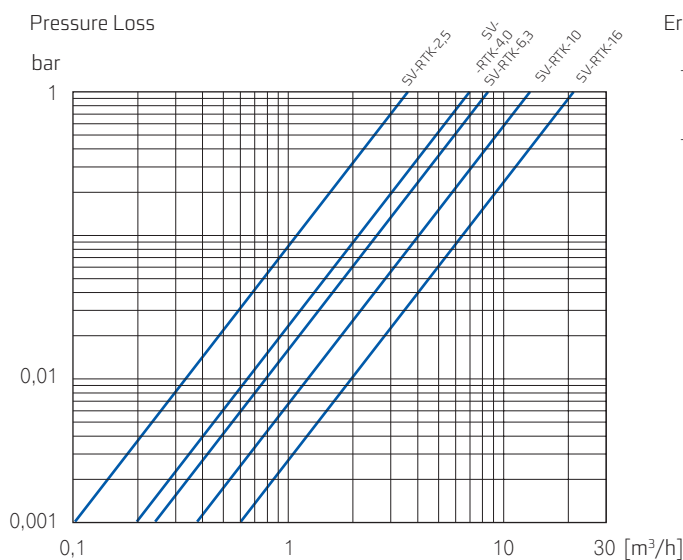

## TYPICAL ERROR CHART

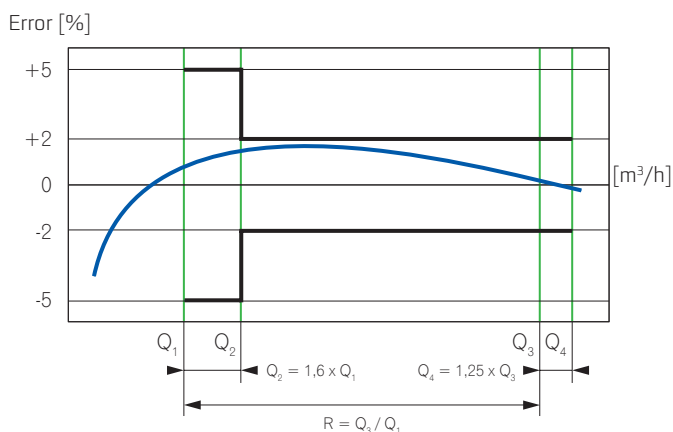

## Remote reading transmission, flow rate measurement

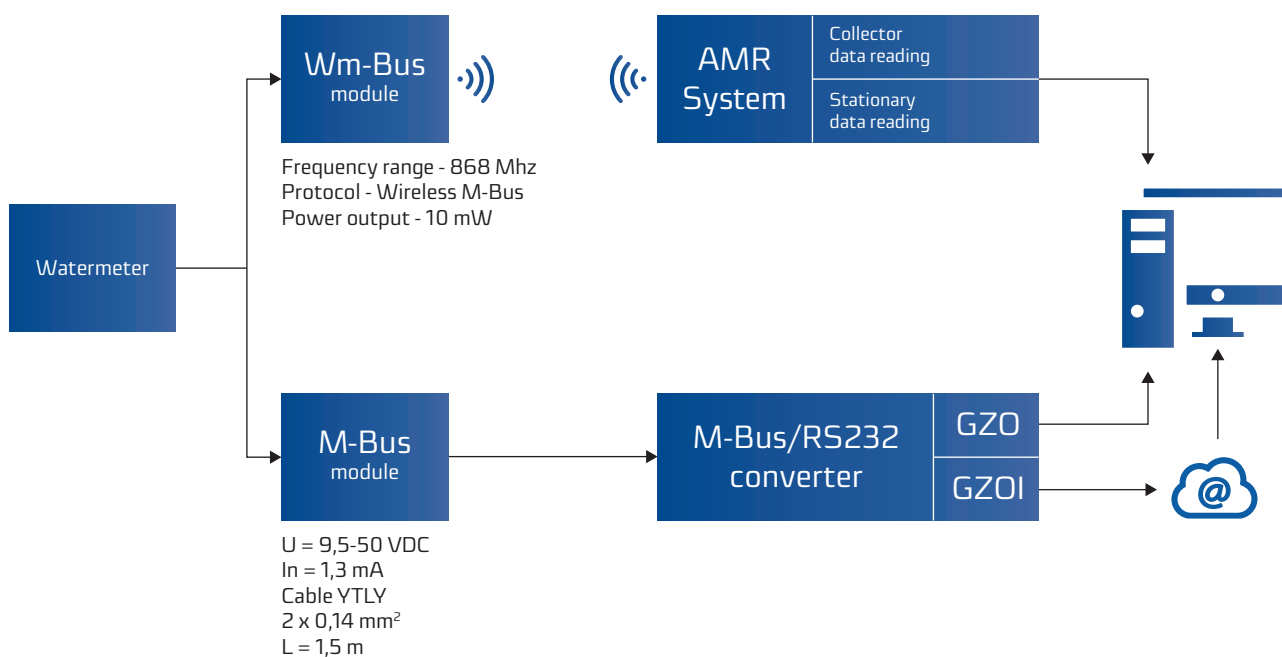

The information presented in the data sheet was correct on the date of publication.  
The manufacturer reserves the right to make changes and improvements to its products without prior notice  
This publication is intended for information purposes only and shall not be construed as a commercial offer under the Polish Civil Code.



Apator Powogaz SA  
ul. Klemensa Janickiego 23/25, 60-542 Poznań  
e-mail: [handel.powogaz@apator.com](mailto:handel.powogaz@apator.com)  
Secretary office: tel. +48 61 8418 101, fax +48 61 8470 192  
Sales department: tel. +48 61 8418 133, 136, 138, 148  
Export department: tel. +48 61 8418 139

[www.apator.com](http://www.apator.com)

2020.026.EN